




UB12750

Specifications		
Nominal Voltage		12V
Rated Capacity (20 hour rate)		75Ah
Dimensions	Tot. Height (with terminal)	8.43 in (214 mm)
	Height	8.19 in (208 mm)
	Length	10.2 in (259 mm)
	Width	6.65 in (169 mm)
Weight		Approx. 52.53 lbs

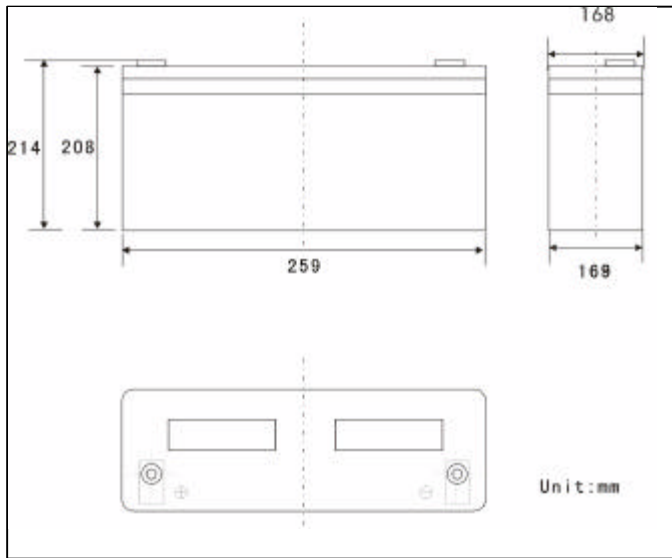

Characteristics		
Capacity 77°F (25°C)	20 hr. rate 20	75Ah
	10 hr. rate 10	69.7Ah
	5 hr. rate 5	63.7Ah
	4 hr. rate 4	61.1Ah
	1 hr. rate 1	45Ah
Internal resistance. Full charged battery 77°F (25°C)		8 milliohms
Capacity affected by Temperature (20 hour rate)	104° F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self Discharge 77°F (25°C)	Capacity after 3 months storage	90%
	Capacity after 6 months storage	80%
	Capacity after 12 months storage	60%
Watts per cell @ 1 hour		29.8
Run time @ 25A		2 hr. 39 min.
Discharge rate @ 4 hours		14.9A
Charge (Constant- Voltage)	Cycle	Initial charging current less than 22.5A. Voltage 14.5~14.9V/12V 77°F (25°C)
	Float	Voltage 13.6~13.8V/12V 77°F (25°C)

